




FUTURE LINE
— MANUFACTURING —

ALUMINUM CONTRACTOR BODIES

LIGHT WEIGHT / FUEL SAVINGS / NO PAINT / DESIGNED TO LAST

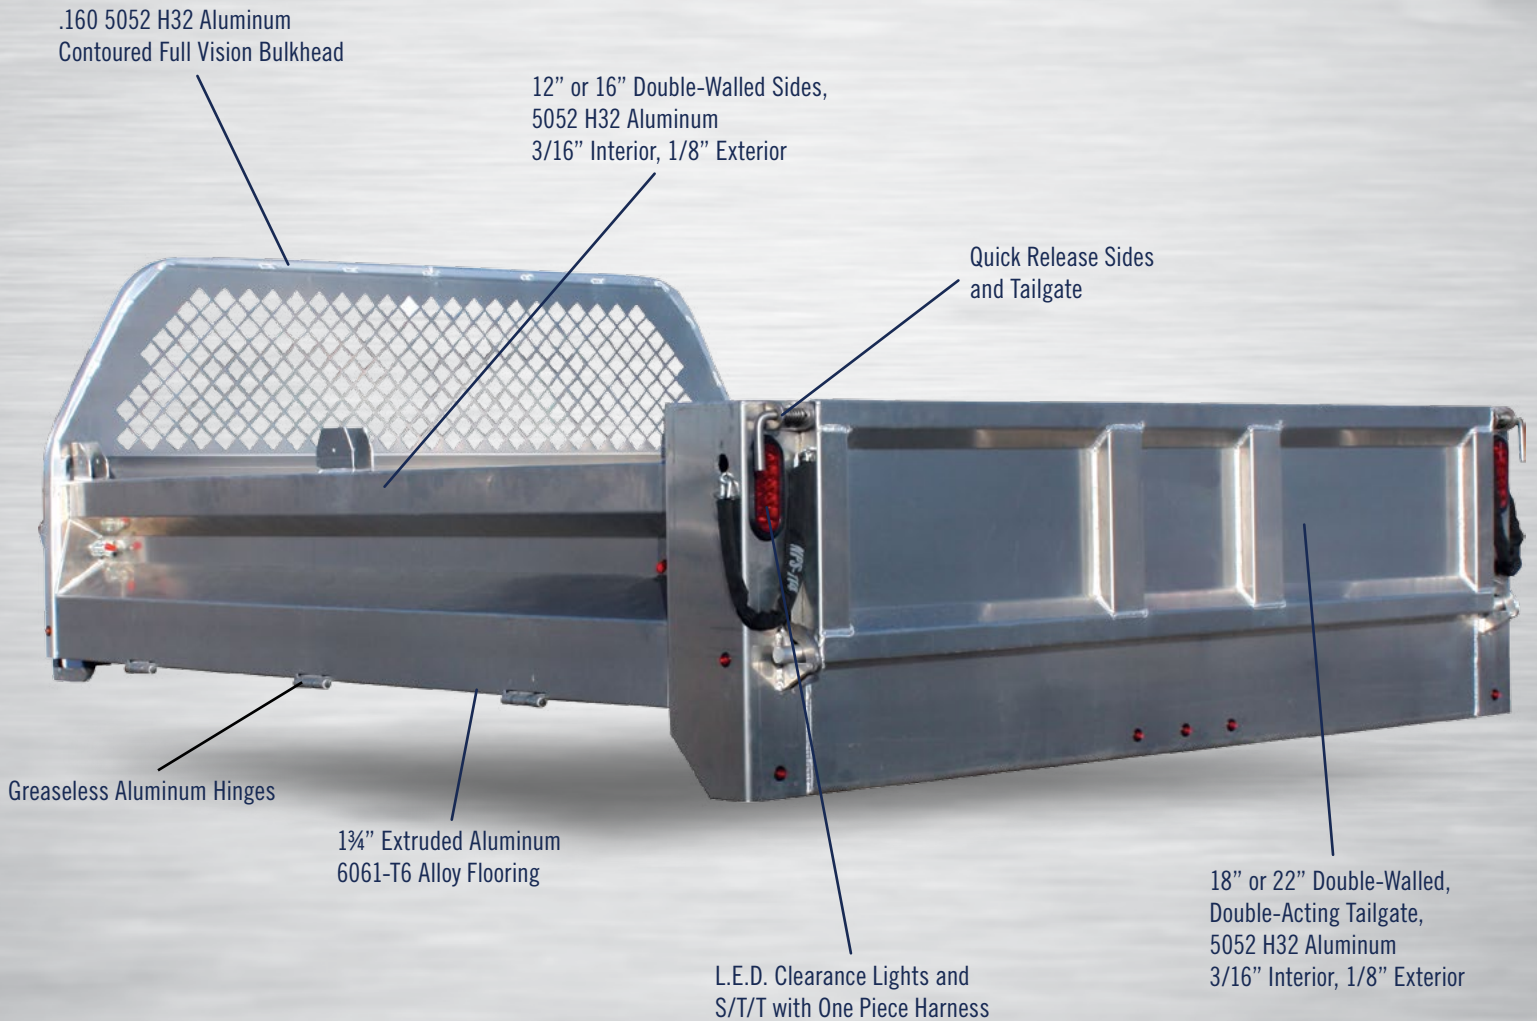

45% LIGHTER THAN STEEL
12% FUEL SAVINGS

*up to 12%





SPECIFICATIONS

STANDARD EQUIPMENT:

- 1¾" Extruded Aluminum Flooring 6061-T6 Alloy
- 3/16" 5052 H32 Aluminum Alloy Sides and Tailgate
- Double Walled Sides and Tailgate
- Large Single Window with Bent 2" x 2" Structural Tubing
- 4" Structural Aluminum Channel Cross Sills 6061-T6 Alloy on 16" Centers (12" Optional)
- 5" Structural Aluminum Channel Long Sills 6061-T6 Alloy on 34" Centers
- Quick Release Sides and Tailgate
- Double Acting Tailgate
- Auxiliary L.E.D. S/T/T Lights in Upper Corner Posts
- Lights Exceed FMVSS-108 Regulations
- Manual Single Lever Tailgate Release

OPTIONAL EQUIPMENT:

- 12V Electric Tailgate Release
- ¼" Cab Shield
- ½" Cab Shield
- Hoist Options
- Coal Chute
- Crossmember-less Floor

FUTURELINE MANUFACTURING 2-3 YD. ALUMINUM CONTRACTOR BODY

| | | | |
|-----------------------------------|---------|---------|---------|
| BODY LENGTH | 9' 4" | 11' 4" | 12' 4" |
| TAILGATE & SIDE HEIGHT | 18"/12" | 18"/12" | 18"/12" |
| BODY WEIGHT (LBS.) | 505 | 550 | 610 |

FUTURELINE MANUFACTURING 3-4 YD. ALUMINUM CONTRACTOR BODY

| | | | |
|-----------------------------------|---------|---------|---------|
| BODY LENGTH | 9' 4" | 11' 4" | 12' 4" |
| TAILGATE & SIDE HEIGHT | 22"/16" | 22"/16" | 22"/16" |
| BODY WEIGHT (LBS.) | 530 | 585 | 655 |